


SurfaPore



Water Repellent & Sealant for:

- Marbles
- Granites
- Tiles that Stain

Water Based
Without Hazardous Solvents

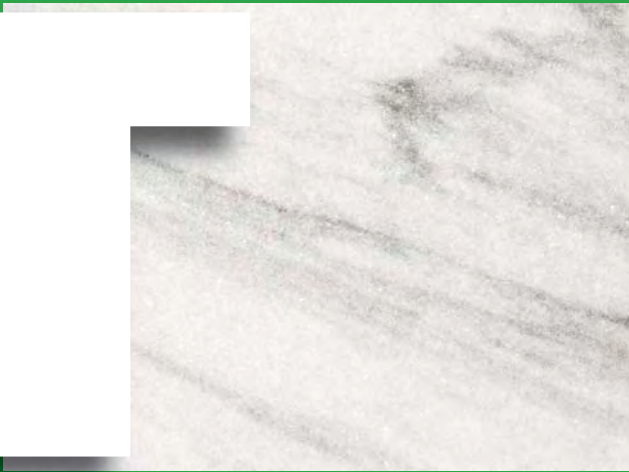

SurfaPore T

Nanotechnology for protecting marble, granite and porcelain surfaces from staining

Staining of porcelain tiles, marble and granite can be disastrous for these valuable surfaces. Create an impermeable and invisible shield by blocking even the finest pores of these surfaces.

Microscopic analysis of marbles, granite and porcelain tiles surfaces reveals multiple interconnected pores that readily collect stains. Subsequently, these surfaces lose their shine and become discoloured. Cleaning them requires significant effort and some stains are impossible to remove. SurfaPore T can be easily applied on your existing or new surfaces and preserve their appearance.

Application: The application surface should be dry and clean. Apply SurfaPore T by using a brush, a roller or spraying. No dilution is required. After 15 minutes and before SurfaPore T dries completely, remove any excess and polish, by using a wet cloth. On sensitive surfaces, reapply within 3 hours. Test results on a small area before full scale application. Maximum effectiveness is achieved 24 hours after application.

Consumption: Estimated consumption rate 14-20 m²/L, strongly dependant on the properties of the surface applied.

Production Date: See packaging.

Properties: Clear, pale yellow water emulsion. Does not alter the appearance of the surface applied, unless the surface is very absorptive. The product must not freeze. Can be stored in its original, sealed container for 24 months after production date. **Safety:** SurfaPore T is a non hazardous product but as a precaution avoid contact with skin or eyes and wear protective gloves and goggles. Dispose this material properly. Keep out of the reach of children. In case of contact with eyes or skin, rinse immediately with plenty of water and seek medical advice. Always request, read and comprehend the Material Safety Data Sheet of the product before application.

Made in the EU. SurfaPore logo is a registered trademark of NanoPhos SA.

VOC (Volatile Organic Compounds) Maximum EU VOC content limit value (Directive 2004/42/CE) of the product in a ready to use condition (category A/i "One pack performance coatings", Type WB): 140 g/L (2007), 140 g/L (2010). Maximum VOC content of this product is 53 g/L.



1 Litre e

Produced by:
NanoPhos SA
Sci. & Technology Park
Lavrio 19500
Greece
Tel. (+30) 22920 69312
www.NanoPhos.com



UK & Ireland Exclusive Distributor: Nanotech Solutions Ltd., 6 Greens Close, Bedfordshire SG19 1AD, UK
Tel/Fax: 01767 680946, www.nanotechsolutions.uk.com